



*GRAIN SPREADERS*



161 DOAN STREET BOX 825  
WILMINGTON, OHIO 45177  
(937) 382-3501  
www.deequipment.com



SM



# BROCK® GRAIN SPREADER

*Brock's Grain Spreader Distributes Grain For Optimum  
Drying/Aeration Uniformity*




Totally-enclosed C-face motor is mounted directly to an in-line gear reducer for no loss of horsepower and no belts to maintain or replace.

Wear plate (shown below) on motor end protects motor in grain flow.

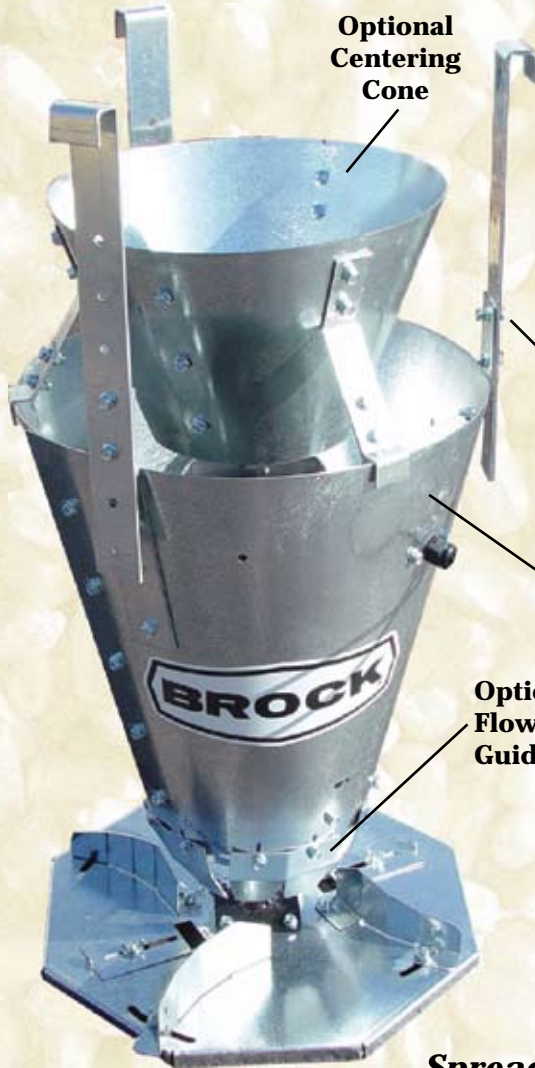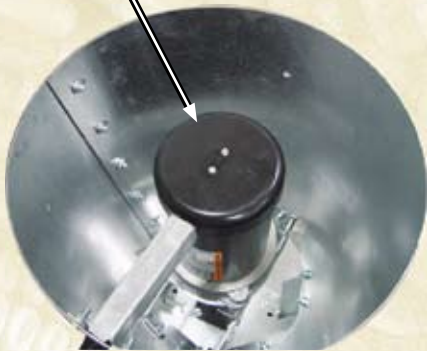

**Optional Centering Cone**

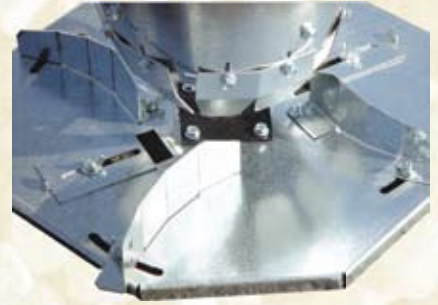

**Spreader impellers** can be adjusted to match the grain throw distance to the bin's diameter.

**Adjustable Hanging Brackets** allow a wide range of hanging heights and fill hole diameters.

**Optional Flow Guides**

**Galvanized steel construction** for durability and low maintenance.

**Optional Centering Cone and Flow Guides** (shown on spreader at left) are used in systems with a flow rate of less than 2,000 bushels per hour.

## Spreader Specifications

### Spreader Capacity (Bushels Per Hour)\*

MODEL	CAPACITY	BIN DIAMETER
GS-3	3,000	24 to 48 Feet 7.3 to 14.6 m
GS-6	6,000	48 to 60 Feet 14.6 to 18.3 m

\* Spreader capacity will vary depending on moisture and type of grain.

SPREADER MODEL	HP	PHASE	VOLTAGE	SPREADER WEIGHT	
GS-31	1/2	1	115	90 Lbs.	41 kg
GS-33	1/2	3	230 / 460	90 Lbs.	41 kg
GS-33-5	1/2	3	575	90 Lbs.	41 kg
GS-61	1-1/2	1	115	100 Lbs.	45 kg
GS-63	1-1/2	3	230 / 460	100 Lbs.	45 kg



**Brock Grain Systems**  
**Chore-Time Brock International**  
 Divisions of CTB, Inc.  
 Milford, IN • Kansas City, MO • Frankfort, IN  
 Phone: 574.658.4191 or +1.574.658.9323 (International)  
 Internet: [www.brockgrain.com](http://www.brockgrain.com) or [www.ctbworld.com](http://www.ctbworld.com)  
 E-Mail: [brock@brockgrain.com](mailto:brock@brockgrain.com)