

Step up to the tough and dependable RoofPro 455XP Coil Nailer. It's loaded with the features you asked for, yet is light enough for one-handed operation. Simply the best roofing nailer money can buy.



## Applications:

For asphalt and fiberglass shingle nailing, for both new roofs and reroofing. Also for attaching waterproof tar paper, metal drip edges, insulation board, and, with a special optional attachment, vinyl and aluminum siding.

## Features and Benefits:


- Aluminum main housing and cap – more durable than magnesium for punishing roofing environments
- Weighs just 5.4 lbs. for easy one-handed operation
- Tool-free adjustable depth of drive for consistent and controllable nail set
- Comfort and convenience features include: durable molded comfort grip, 360 tool-free adjustable exhaust, and adjustable shingle guide
- Steel wearplates reduce shingle abrasion on tool
- Adjustable nail canister accommodates entire range of true round-head roofing nails
- Tool includes case, tool oil and wrench

## Tool Specifications:

Item #: 3D0101N: Sequential Actuation (Restrictive)  
 Weight: 5.4 lbs. ( 2.5 kg)  
 Height: 9 3/4" (247.65 mm)  
 Length: 9 3/4" (247.65 mm)  
 Nail Capacity: 120  
 Collation: Conical wound, angled coil wire  
 Operating Pressure: 70-120 psig (4.8-8.3 bar)  
 Mode of Operation: Tool is available with either sequential or contact actuation trigger mechanism.  
 Hose Fitting: 1/4" NPT

## Fastener Specifications:

Drives 11 gauge (.120"), Full Round Head Nails 3/4" 1 3/4" smooth shank. Capacity 120.

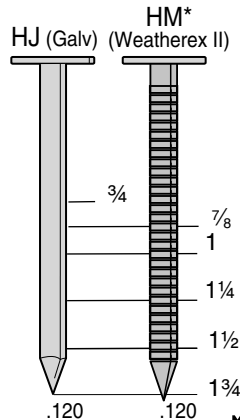


Length	Item Code	Carton Count	Finish
3/4 x .120	M003101	7.2M	Galv
7/8 x .120	M003102	7.2M	Galv
1 x .120	M003103	7.2M	Galv
1 1/4 x .120	M003104	7.2M	Galv
1 1/2 x .120	M003105	7.2M	Galv
1 3/4 x .120	M003106	7.2M	Galv
7/8 x .120	HM12ADAP	7.2M	Weatherex II
1 1/4 x .120	HM15ADAP	7.2M	Weatherex II
1 1/2 x .120	HM17ADAP	7.2M	Weatherex II
1 3/4 x .120	HM19ADAP	7.2M	Weatherex II



# RoofPro™ 455XP

## XtremePro™ 1¾" Coil Roofing Nailer

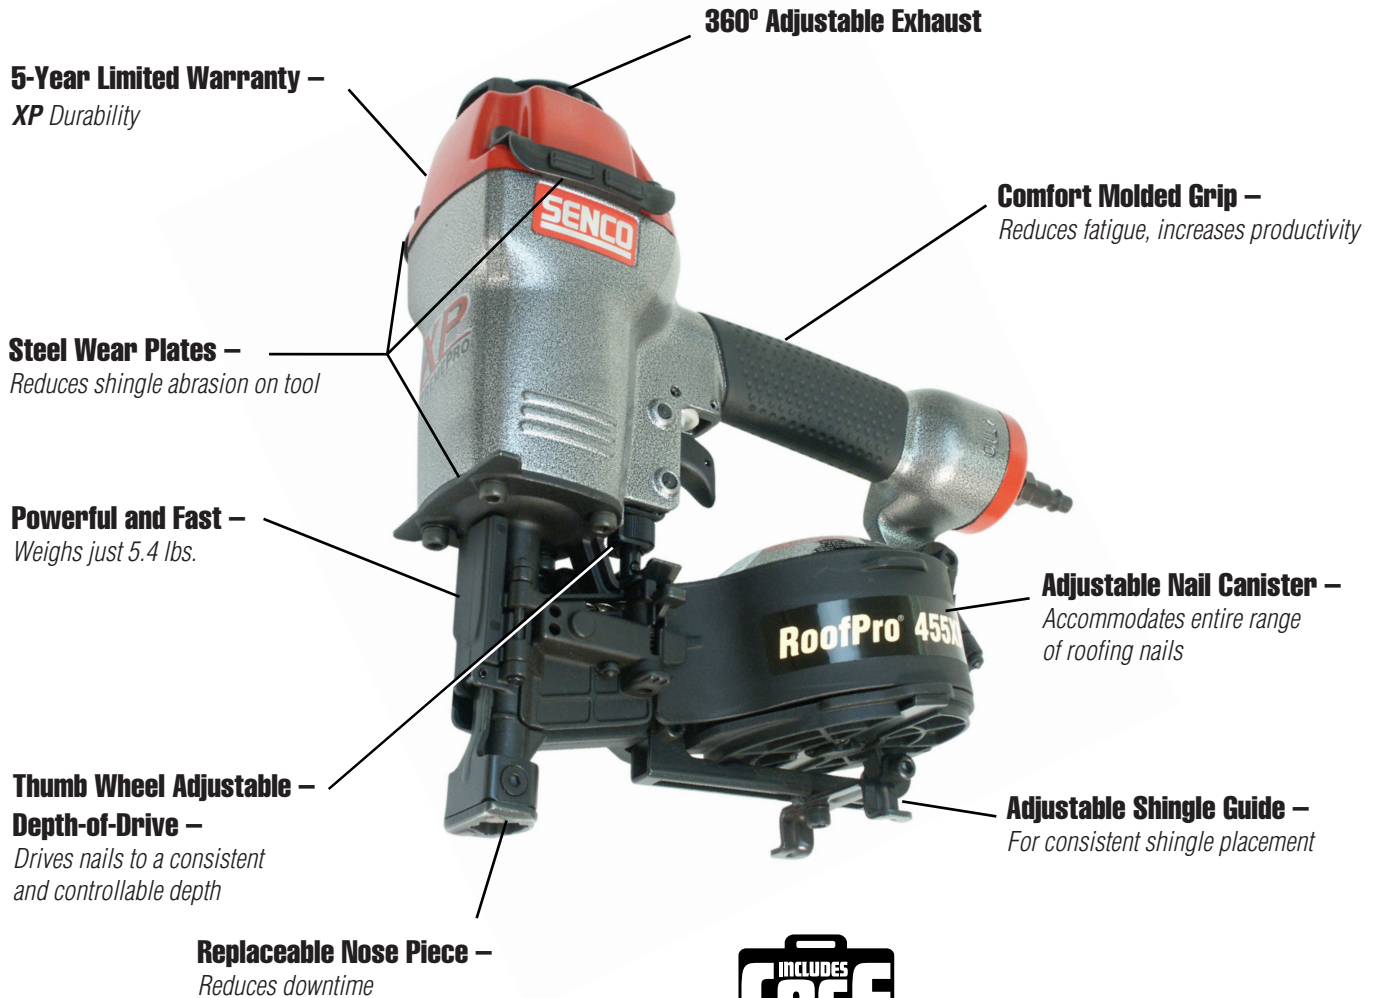

**5-Year Limited Warranty –**  
*XP Durability*

**360° Adjustable Exhaust**

**Comfort Molded Grip –**  
*Reduces fatigue, increases productivity*

**Steel Wear Plates –**  
*Reduces shingle abrasion on tool*

**Powerful and Fast –**  
*Weighs just 5.4 lbs.*

**Adjustable Nail Canister –**  
*Accommodates entire range of roofing nails*

**Thumb Wheel Adjustable –**  
**Depth-of-Drive –**  
*Drives nails to a consistent and controllable depth*

**Adjustable Shingle Guide –**  
*For consistent shingle placement*

**Replaceable Nose Piece –**  
*Reduces downtime*



Tool includes case, tool oil and wrench.

### Choose the right trigger system for your specific needs!

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCO will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: [www.senco.com](http://www.senco.com)

<b>RoofPro 455XP Accessories</b>	<b>Item #</b>
Vinyl/Aluminum Siding attachment	21192900066
Parts Kit	YK0424, YK0425
<b>Compressor</b>	
1.5hp, 2.5 gal. 110v, hand carry	PC0968
2.5hp, 4.3 gal. 110v, hand carry	PC1131
1.5hp 8 gal. 110v/230v, wheelbarrow	PC2016
5.5hp, 8 gal. Honda gas, wheelbarrow	PC2017



161 DOAN STREET BOX 825  
WILMINGTON, OHIO 45177  
(937) 382-3501  
[www.deequipment.com](http://www.deequipment.com)