

The lightweight SNS45XP Stapler is built to last. With 30% fewer parts and 15% more power than comparable tools, it's one stapler you won't want to put down. Weighing just 5.1 pounds, it has the best power-to-weight ratio in its class. Plus, it drives staples at a rate of 15 cycles per second.



Applications:

Used for on-site and manufactured housing, for roof and floor decking, sheathing, subflooring, fascia and soffits, lathing, fencing and cedar shingles. Also for furniture frames, boxes, crates, pallets and pallet repair.

Features and Benefits:

- Five year limited warranty
- Comfort and convenience features include overmold trigger and grip
- Best in class power-to-weight ratio
- Drives 16 gauge staples from 1" – 2"
- Drives 15 staples per second
- Tool-less 360° adjustable exhaust
- Lightweight at 5.1 lbs
- Adjustable depth-of-drive
- EZ-clear™ latch provides quick and easy clearing of occasional jams
- Available with "Restrictive Trigger" or "Dual Action" activating mechanism


Tool Specifications:

Item #: 580101N: Contact Actuation (Dual Action)
 580103N: Contact Actuation w/case
 580102N: Sequential Actuation (Restrictive)

Weight: 5.1 lbs. (2.3 kg)
 Height: 11" (279.4 mm)
 Length: 14" (355.6 mm)
 Lip Length: 1" (25 mm)
 Staple Capacity: 160
 Operating Pressure: 80-120 psig
 Mode of Operation: Tool is available with either sequential or contact actuation trigger mechanism
 Hose Fitting: 3/8" NPT

Fastener Specifications:

Thickness: .062 (1.57 mm), Crown 7/16" (11 mm)
 Staples: Drives 16 ga. staples from 1" (25 mm) - 2" (50 mm)

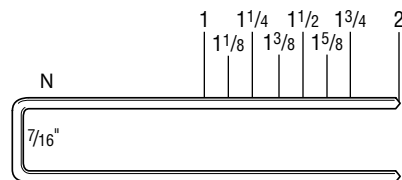



Powerful and Fast –
*Drives up to 15 staples
per second*

Adjustable Exhaust 360° –
No tools required

Comfort Overmold Grip –
Reduces fatigue, increases productivity

EZ-Clear™ Guide Body –
To clear jams fast

Adjustable Depth-of-Drive –
*Drives nails to a consistent and
controllable depth*

Overmold Trigger –
Reduces fatigue

Choose the right trigger system for your specific needs!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCOR will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com



161 DOAN STREET BOX 825
WILMINGTON, OHIO 45177
(937) 382-3501
www.deequipment.com